


COM-1931 L/S-band burst spread-spectrum transceiver

Key Features

- L/S-band modem to send and receive short UDP frames over wireless, satellite or cable. (for continuous-mode see [COM-1918](#))
 - Direct-Sequence Spread-Spectrum (DSSS) modulation
 - Nominal frequency of operation: 950 – 2175 MHz for direct connection to external LNB or BUC. Customization to other frequency bands is possible.
 - Burst mode operation:
 - fixed-length 512-bit data frames from/to LAN/UDP ports
 - Multiple frames transmitted efficiently with only 32-symbol separation.
 - Acquisition: 1600-symbol preamble with no apriori knowledge of arrival time
 - Large frequency acquisition range: $\pm(\text{chip_rate} / 64)$ or $(1.8 * \text{symbol_rate})$, whichever is smaller, with no apriori knowledge.
 - End-to-end latency: 2672 symbol / modulation symbol rate. For example 1.2ms at 2.5Msymbols/s.
 - Programmable chip rate, up to 40 Mchips/s
 - 2047-chip Gold codes
 - Data rate: practical range from $\text{chip_rate}/2047$ to $\text{chip_rate}/30$
 - Convolutional or Turbo code error correction.
 - Built-in IP router with gigabit Ethernet LAN port
 - Supply voltage: 18¹ – 36VDC with reverse voltage and surge protection.
- Frequency reference: internal TCXO or input for an external, higher-stability 10 MHz frequency reference.
 - Built-in tools: PRBS-11 pseudo-random test sequence, BER tester, AWGN generator, internal loopback mode.
 - Monitoring:
 - Carrier frequency error
 - SNR
 - BER
 -  **ComScope** –enabled: key internal signals can be captured in real-time and displayed on host computer.




For the latest data sheet, please refer to the **ComBlock** web site: <http://www.comblock.com/download/com1931.pdf>. These specifications are subject to change without notice.

For an up-to-date list of **ComBlock** modules, please refer to http://www.comblock.com/product_list.html.

¹ 5.6V min when not supplying external LNB power



Functional Block Diagram

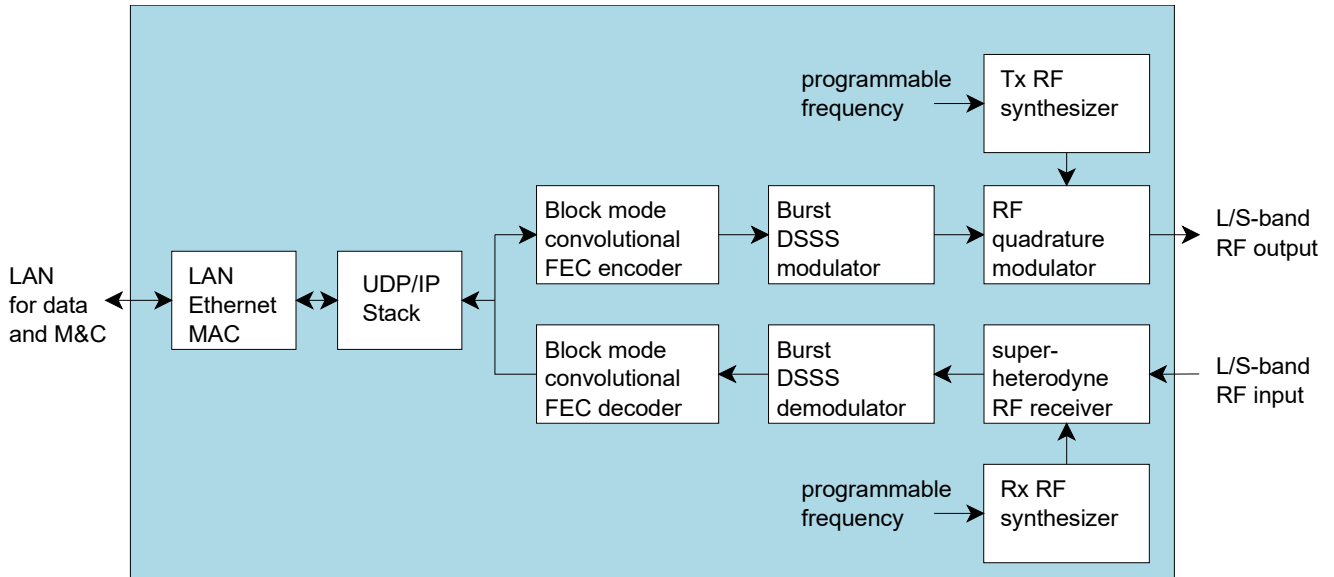




150006

Configuration (Basic)

The easiest way to configure the COM-1931 is to use the **ComBlock Control Center** software supplied with the module on CD. Please follow the few simple steps described in the user manual "[ccchelp.pdf](#)" document to install the ComBlock Control Center software "ComBlock_Control_Center_windows_rev.exe"

Connect the LAN cable between PC and transceiver RJ45 connector labeled "M&C LAN". Turn the transceiver power supply on and wait approximately 5-10 seconds. In the **ComBlock Control Center** window, click on the left-most button and select LAN as primary communication media. The default IP address is 172.16.1.128.

In the **ComBlock Control Center** window detect the ComBlock module(s) by clicking the  *Detect* button, next click to highlight the COM-1931 module to be configured, next click the  *Settings* button to display the *Settings* window shown below.

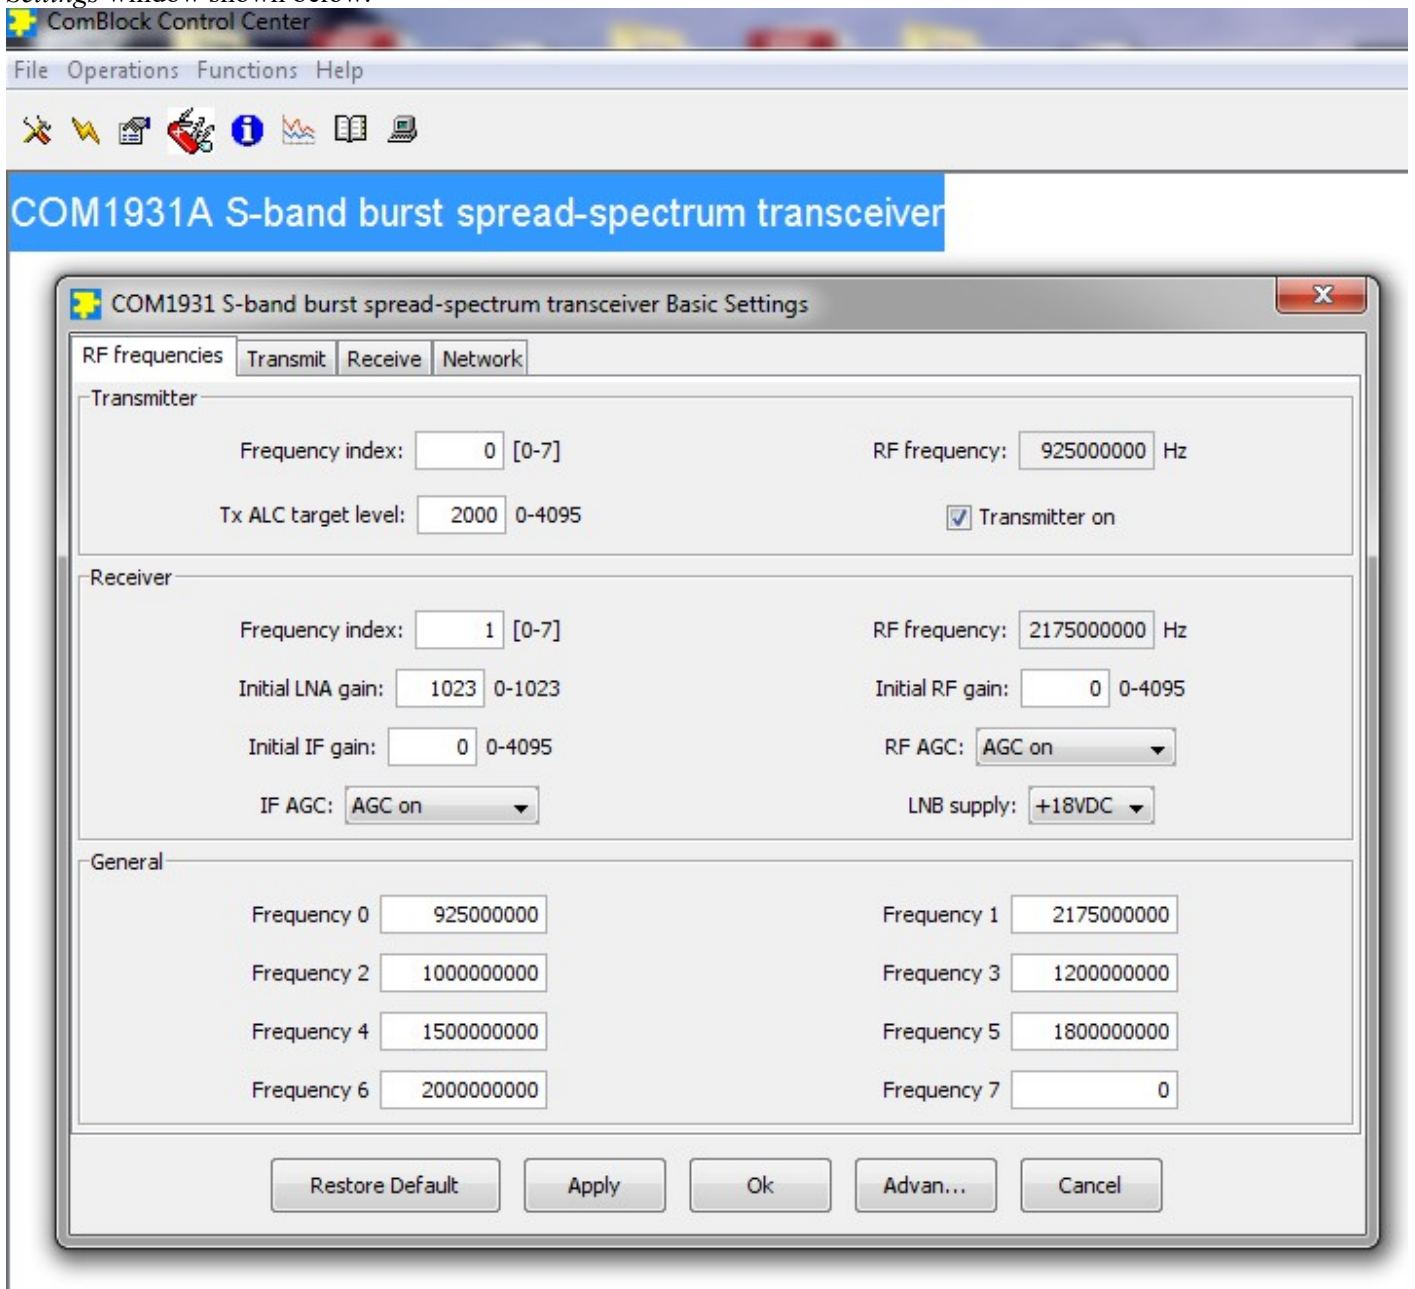

COM1931 S-band burst spread-spectrum transceiver Basic Settings

RF frequencies Transmit Receive Network


Chip rate: 5000000 Chips/s I-code: 2225 Octal

I-channel symbol rate: 128000 Symbols/s Tx center frequency offset: 0 Hz

Input Selection: LAN/UDP port 1024

Spectrum inversion FEC encoding

Signal amplitude: 30000 range 0-65536 Noise amplitude: 0 range 0-65536

 Tx frame counter: 0

Restore Default Apply Ok Advan... Cancel

COM1931 S-band burst spread-spectrum transceiver Basic Settings


RF frequencies Transmit Receive Network

Chip rate: 5000000 Chips/s I-code: 2225 Octal


I-channel symbol rate: 128000 Symbols/s Rx center frequency offset: 0 Hz

AGC response time: 6 0 - 14 Loopback test mode

Spectrum inversion FEC decoding

 Rx frame counter: 0

Restore Default Apply Ok Advan... Cancel

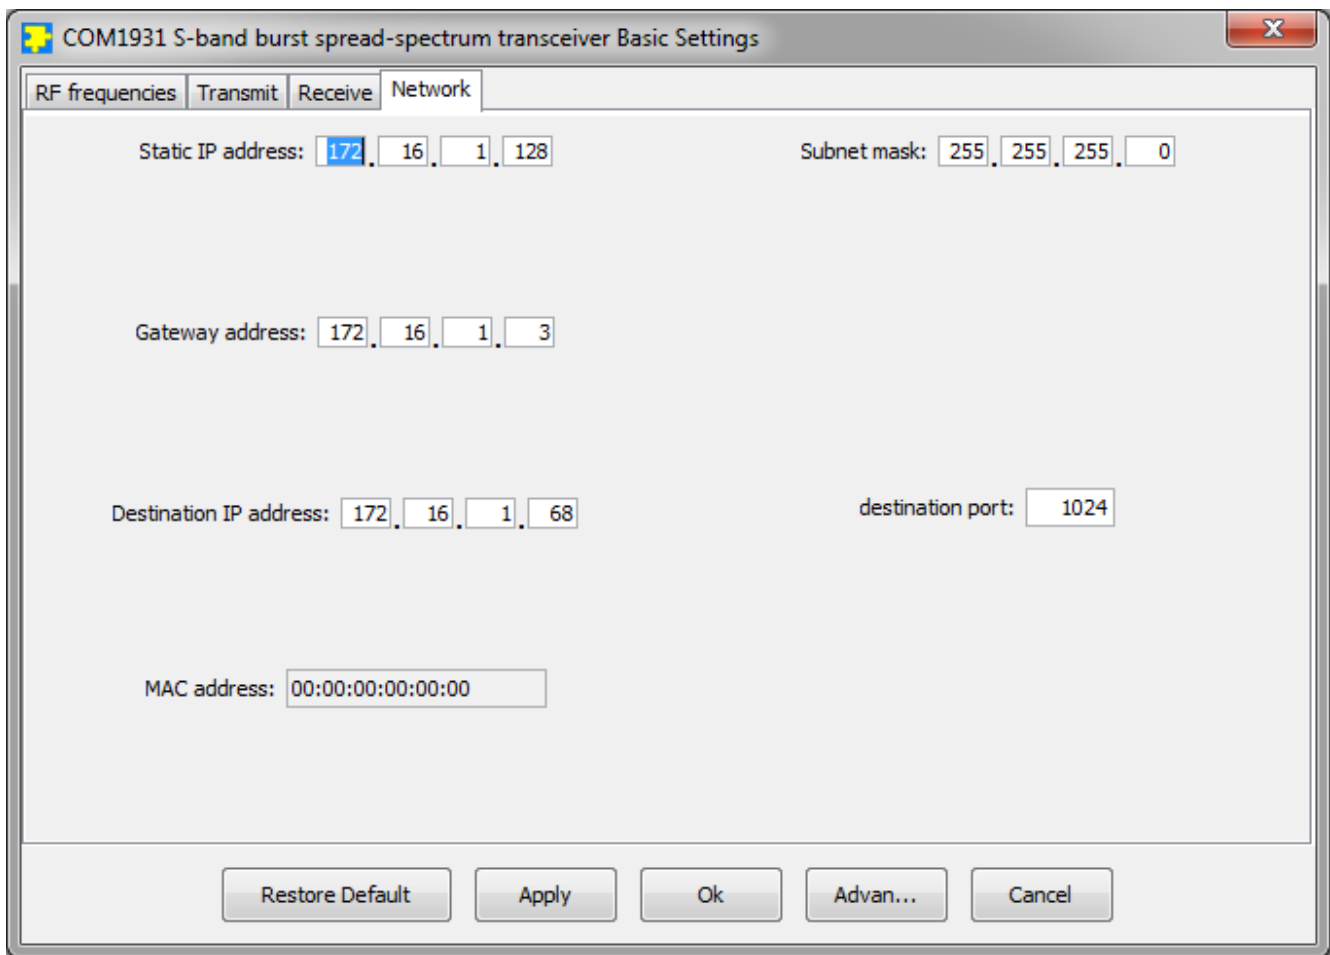

Configuration (Advanced)

Alternatively, users can access the full set of configuration features by specifying 8-bit control registers as listed below. These control registers can be set manually through the ComBlock Control Center “Advanced” configuration or by software using the ComBlock API (see www.comblock.com/download/M&C_reference.pdf)

All control registers are read/write. Definitions for the [Control registers](#) and [Status registers](#) are provided below.

Control Registers

The module configuration parameters are stored in volatile (SRT command) or non-volatile memory (SRG command). The stored configuration is automatically loaded up at power up. All control registers are read/write.

Note: several multi-byte fields like the IP addresses are enacted upon (re-)writing to the last control register (REG141)

Several key parameters are computed on the basis of the 160 MHz ADC clock $f_{\text{clk_adc}}$ or the 120 MHz internal processing clock $f_{\text{clk_p}}$.

RF	Configuration
Stored frequency f_0	Preselected transmitter or receiver frequency f_0 . (one of eight stored frequencies) Valid range 925 MHz – 2.175 GHz, expressed in Hz. REG0: bit 7:0 (LSB) REG1: bit 15:8 REG2: bit 23:16 REG3: bit 31:24 (MSB)
Receiver frequency selection	Use to switch the receiver center frequency among preselected values. Range 0 through 7 REG6(2:0)
Transmitter frequency selection	Use to switch the transmitter center frequency among preselected values. Range 0 through 7 The rx/tx frequencies change is enacted upon writing to REG6. REG6(6:4)
Stored frequency f_x	Seven additional preselected frequencies x = 1 through 7 Same format as f_0 . REG(3+4*x): bits 7:0 (LSB) REG(4+4*x): bits 15:8 REG(5+4*x): bits 23:16 REG(6+4*x): bits 31:24 (MSB)
Receiver RF Gain	Initial RF gain (before the RF AGC takes over). 12-bit. 0 for the minimum gain, 4095 for the maximum gain. The receiver RF gain change is enacted upon writing to REG5. REG4: bits 7:0 (LSB) REG5(3:0): bits 11:8
Receiver IF Gain	Initial IF gain (before the IF AGC takes over). 12-bit. 0 for the minimum gain, 4095 for the maximum gain. The receiver IF gain change is enacted upon writing to REG36. REG35: bits 7:0 (LSB) REG36(3:0): bits 11:8
Receiver LNA Gain	LNA gain 10-bit. 0 for the minimum gain, 1023 for the maximum gain. The receiver IF gain change is enacted upon writing to REG41. REG40: bits 7:0 (LSB) REG41(3:0): bits 11:8
Transmitter ALC target	The transmit gain is automatically adjusted so that the measured tx power equals this field. The transmitter gain change is enacted upon writing to REG38. REG37: bits 7:0 (LSB) REG38(3:0): bits 11:8
Receiver LNA AGC loop	0 = open loop. LNA path gain is fixed by control registers. 1 = AGC on. Gain is adjusted on the basis of the RSSI measurement. REG39(0)
Receiver RF AGC loop	0 = open loop. RF path gain is fixed by control registers. 1 = AGC on. Out-of-range conditions are detected at the RF mixer and IF power detector.

	REG39(1)
Receiver IFAGC loop	0 = open loop. IF1 path gain is fixed by control registers. 1 = AGC on. Out-of-range conditions are detected at the IF power detector. REG39(3:2)
Transmitter ON	0 = off 1 = on REG39(6)
LNB supply	The transceiver is capable of supplying up to 500mA at 13VDC or 18VDC to an external LNB. This supply voltage is multiplexed with the RF input signal onto the “RF Rx” input. 0 = LNB supply off 1 = LNB supply on Warning: Enabling the LNB supply may cause damage to test equipment unless a DC block is used. REG43(0)
LNB supply 13V vs 18V	0 = 13VDC LNB supply 1 = 18VDC LNB supply REG43(1)
General Parameters	Configuration
Internal/External frequency reference	10 MHz output generated from 10 MHz input (-B firmware option) or 19.2 MHz TCXO (-A firmware option) REG46(1): enable(1)/disable(0) CLKREF_OUT (special connector on front-panel) REG46(2): enable(1)/disable(0) CLK_LNB (multiplexed with received signal) REG46(3): enable(1)/disable(0) CLK_TX (multiplexed modulated transmit signal + 10 MHz)
FEC encoding	K=9 rate ½ convolutional code with zero tail bits. 0 = bypassed 1 = FEC encoding enabled REG47(0)
FEC decoding	0 = bypassed 1 = FEC decoding enabled REG47(1)
Modulator	Configuration
Processing clock f_{clk_tx}	Modulator processing clock. Also serves as DAC sampling clock. Expressed as as $f_{clk_tx} = f_{clk_p} * M / (D * O)$ where D is an integer divider in the range 1 - 106 M is a multiplier in the range 2.0 to 64.0 by steps of 1.0. Fixed point format 7.3 O is a divider in the range 2.0 to 128.0 by steps of 1.0. Fixed point format 7.3 Note: the graphical use interface computes the best values for M, D and O. f_{clk_tx} recommended range 80-160 MHz. REG48(6:0) = D REG49 = M(7:0) REG50(1:0) = M(9:8) REG51 = O(7:0) REG52(2:0) = O(10:8)
Chip rate $f_{chip_rate_tx}$	The modulator chip rate is in the form $f_{chip_rate_tx} = f_{clk_tx} / 2^n$ where n ranges from 1 (2 samples per chip) to 15 (chip rate = $f_{clk_tx} / 32768$). n is defined in REG53(3:0)
I Code	Linear feedback shift register initialization. As per [1]

	REG54 LSB REG55(2:0) MSb
Q Code	REG56 LSB REG57(2:0) MSb
I channel symbol rate $f_{\text{symbol_rate_i}}$	The I-channel symbol rate can be set independently of the spreading code period as $f_{\text{symbol_rate}} * 2^{32} / f_{\text{clk_tx}}$ REG65 (LSB) – REG62 (MSB)
Q channel symbol rate $f_{\text{symbol_rate_q}}$	The Q-channel symbol rate can be set independently of the spreading code period as $f_{\text{symbol_rate}} * 2^{32} / f_{\text{clk_tx}}$ REG69 (LSB) – REG66 (MSB)
Output center frequency (f_c)	The modulated signal center frequency can be shifted in frequency 32-bit signed integer (2's complement representation) expressed as $f_c * 2^{32} / f_{\text{clk_tx}}$ REG73 (LSB) – REG70 (MSB)
Sinusoidal frequency offset	In addition to the fixed frequency offset above, a sinusoidal frequency offset can be generated to mimic Doppler rate in highly mobile applications. This offset is characterized by two parameters: amplitude and period. The amplitude (a frequency) is expressed as $f_{\text{c_amplitude}} * 2^{32} / f_{\text{clk_tx}}$ in the following control registers: REG74(LSB) – REG77 (MSB) The period is expressed as $2^{32} / (f_{\text{clk_tx}} * T)$ in the following control registers: REG78(LSB) – REG81 (MSB)
Digital Signal gain	16-bit amplitude scaling factor for the modulated signal. The maximum level should be adjusted to prevent saturation. The settings may vary slightly with the selected chip rate. Please check for saturation (see test points) when changing either the chip rate or the signal gain. REG82 = LSB REG83 = MSB
Additive White Gaussian Noise gain	16-bit amplitude scaling factor for additive white Gaussian noise. Because of the potential for saturation, please check for saturation (see test points) when changing this parameter. REG84 = LSB REG85 = MSB
Input selection	0 = from UDP port 1024 1 = internal pseudo-random test sequence. 100ms repetition 2 = internal pseudo-random test sequence continuous transmission 3 = unmodulated test mode (carrier only) REG86(1:0)
Spectrum inversion	Invert Q bit 0 = off 1 = on REG86(3)
BPSK / SQPN	0 = BPSK 1 = SQPN REG86(4) Future feature. BPSK baseline

TX_ENB control	<p>The TX_ENB signal at the interface controls the RF transmit circuit. During normal operations, the transmitter and ancillary circuits (RF LO) are muted outside of a transmit burst.</p> <p>REG86(5) = 0</p> <p>However, during tests, the transmitter can be forced to stay ON at all times, for example when the AWGN is generated within.</p> <p>REG86(5) = 1</p>
----------------	---

Demodulator	
Parameters	Configuration
Tx-Rx loopback	REG121(7): enable (1) or disable(0) loopback test mode
Nominal chip rate $f_{\text{chip_rate_rx}}$	<p>32-bit integer expressed as $f_{\text{chip_rate_rx}} * 2^{32} / f_{\text{clk_adc}}$. The maximum practical chip rate is $f_{\text{clk_adc}} / 2$.</p> <p>The maximum allowed error between transmitted and received chip rate is +/- 100ppm.</p> <p>REG91 (LSB) – REG94(MSB)</p>
I Code	<p>Linear feedback shift register A initialization.</p> <p>REG97 LSB REG98(2:0) MSb</p>
Q Code	<p>Linear feedback shift register C</p> <p>REG99 LSB REG100(2:0) MSb</p>
Nominal I channel symbol rate $f_{\text{symbol_rate_i}}$	<p>Nominal I-channel symbol rate, defined as $f_{\text{symbol_rate_i}} * 2^{32} / f_{\text{clk_adc}}$</p> <p>REG103 (LSB) – REG106 (MSB)</p>
Nominal Q channel symbol rate $f_{\text{symbol_rate_q}}$	<p>Nominal Q-channel symbol rate, defined as $f_{\text{symbol_rate_q}} * 2^{32} / f_{\text{clk_adc}}$</p> <p>REG107 (LSB) – REG110 (MSB)</p>
I channel spreading factor (Processing gain)	<p>Approximate (i.e rounded) ratio of chip rate / symbol rate Range: 3 – 2047 Note: to effectively achieve this processing gain, the code period must be longer than one symbol duration.</p> <p>REG111 (LSB) REG112(4:0) MSb</p>
Q channel spreading factor (Processing gain)	<p>Approximate (i.e rounded) ratio of chip rate / symbol rate</p> <p>REG113 (LSB) REG114(4:0) MSb</p>
Nominal input center frequency (f_c)	<p>The nominal center frequency is a fixed frequency offset applied to the input samples. It is used for fine frequency corrections, for example to correct clock drifts.</p> <p>32-bit signed integer (2's complement representation) expressed as $f_c * 2^{32} / f_{\text{clk_adc}}$</p> <p>In addition to this fixed value, an optional time-dependent frequency profile can be entered (future).</p> <p>REG115 (LSB) – REG118 (MSB)</p>
Spectrum inversion	<p>Invert Q bit</p> <p>0 = off 1 = on</p> <p>REG119(0)</p>
BPSK / SQPN	<p>0 = BPSK 1 = SQPN</p> <p>Future feature. BPSK baseline.</p> <p>REG119(1)</p>

AGC response time	<p>Users can to optimize AGC response time while avoiding instabilities (depends on external factors such as gain signal filtering at the RF front-end and chip rate). The AGC_DAC gain control signal is updated as follows</p> <p>0 = every chip, 1 = every 2 input chips, 2 = every 4 input chips, 3 = every 8 input chips, etc.... 10 = every 1000 input chips. Valid range 0 to 14. REG121(4:0)</p>
-------------------	--

Network Interface	
Parameters	Configuration
LAN MAC address LSB	REG123. To ensure uniqueness of MAC address. The MAC address most significant bytes are tied to the FPGA DNA ID. However, since Xilinx cannot guarantee the DNA ID uniqueness, this register can be set at the time of manufacturing to ensure uniqueness.
Static IP address	4-byte IPv4 address. Example : 0x AC 10 01 80 designates address 172.16.1.128 (default IP address) REG132 (MSB) – REG135(LSB)
Subnet mask	REG128 (MSB) – REG131(LSB)
Gateway IP address	REG124 (MSB) – REG127(LSB)
Destination IP address	4-byte IPv4 address Destination IP address for UDP frames with decoded data. REG136 (MSB) – REG139(LSB)
Destination ports	I-channel data is routed to this user-defined port number: REG140(LSB) – REG141(MSB)

Note: several multi-byte fields like the IP addresses are enacted upon (re-)writing to the last control register (REG141)

Monitoring

Status Registers

Parameters	Monitoring
Hardware self-check	<p>At power-up, the hardware platform performs a quick self check. The result is stored in status registers SREG0-4, SREG16-18</p> <p>Properly operating hardware will result in the following sequence being displayed: SREG0-SREG4 = 01 F1 1D xx 7F, where xx (bad NAND flash sectors) must be less than 10 SREG16-18 = 0x22 00 87</p>
Power supply check	<p>SREG4(0): PGOOD1 RF1_+3.1V SREG4(1): PGOOD2 IF1+_3.1V SREG4(2): PGOOD3 A_+4.75V SREG4(3): PGOOD4 MOD_+4.8V SREG4(4): PGOOD5 TX_SYNTH_+3.3V SREG4(5): PGOOD6 RX_+4.75V SREG4(6): PGOOD7 RX_SYNTH_+3.3V Overall valid response: 0x7F</p>
RSSI	<p>Received signal strength indicator. 12-bit number Practical range -70 to -5 dBm after LNA See RF_POWER_DET1 in schematic. SREG5 = LSB SREG6(3:0) = MSB</p>
Received power at RF mixer	<p>Power detection at RF mixer. Target is 0xEC0 while the RF AGC is tracking See RF_POWER_DET2 in schematic.</p>


	SREG7 = LSB SREG8(3:0) = MSB
Received power at IF	Power detection at IF after bandpass filter and IF gain control. Target is 0xE80 while the IF AGC is tracking. See IF1_POWER_DET in schematic. SREG9 = LSB SREG10(3:0) = MSB
Transmit power	Power detection at the RF transmit output. See TX_POWER_DET in schematic. SREG11 = LSB SREG12(3:0) = MSB
RF synthesizers locked	'1' when locked SREG19(0): rx synthesizer locked SREG19(1): tx synthesizer locked
FEC codec type	0 = convolutional K=7 rate 1/2 1 = TPC SREG19(7 downto 4)
DSSS demodulator monitoring	
FEC decoder input BER measurement	The burst-mode FEC decoder computes the input BER prior to decoding. Measured in a frame. This method works with any bit sequence. SREG20 (LSB) - SREG22 (MSB)
BER tester synchronized	SREG23(0): 1 when the BERT is synchronized with the received PRBS-11 test sequence.
Bit error rate	Monitors the BER (number of bit errors over 10,000 received bits) when the modulator is sending a PRBS-11 test sequence. SREG24 (LSB) – 27 (MSB)
Number of transmitted frames	SREG28 (LSB) – 30 (MSB)
Number of received frames	SREG31 (LSB) – 33 (MSB)
Number of parallel code acquisition circuits	The number of parallel code acquisition circuits is expressed as NACQ = NACQ_DIV * NMUX SREG34: NACQ_DIV SREG35: NMUX
Non-coherent integration and dump period N_NCID	SREG36
Measured modulated signal power	SREG37(LSB) SREG38 SREG39(MSB)
Measured AWGN power	Approximation: noise power is uniform over a range of +/- $f_{clk_tx} / 2$ Therefore, the noise density depends on the selected modulator chip rate (see f_{clk_tx} equation above) SREG40(LSB) SREG41 SREG42(MSB)
Carrier frequency offset1	Residual frequency offset with respect to the nominal carrier frequency (i.e. after frequency profile correction). Part 1/2. 32-bit signed integer expressed as $fc_{error} * 2^{32} / f_{clk_p}$ SREG43 (LSB) – SREG46 (MSB)
Carrier frequency offset2	Residual frequency offset with respect to the nominal carrier frequency (i.e. after frequency profile correction). Part 2/2. 32-bit signed integer expressed as $fc_{error} * 2^{31} / f_{chip_rate}$ SREG47 (LSB) – SREG50 (MSB)

SNR	$2 \cdot (S+N)/N$ ratio, valid only during code lock. Linear (not in dBs) Fixed point format 14.2 SREG51 (LSB) – SREG52 (MSB)
CIC_R	Receiver decimation factor from $f_{\text{clk_adc}}$ to $4 \cdot f_{\text{chip_rate_rx}}$. Valid range 1 - 16384 SREG53 (LSB) – SREG54 (MSB)

Network Monitoring	
Parameters	Monitoring
LAN PHY ID	Expect 0x22 when LAN adapter is plugged in. SREG16
MAC address	Unique 48-bit hardware address (802.3). In the form SREG53:SREG54:SREG55:....:SREG58

Multi-byte status variables are latched upon (re-)reading SREG16.

ComScope Monitoring

Key internal signals can be captured in real-time and displayed on a host computer using the ComScope feature of the ComBlock Control Center. Click on the  button to start, then select the signal traces and trigger are defined as follows:


Trace 1 signals	Format	Nominal sampling rate	Buffer length (samples)
1: I-channel spread input, directly from ADC (could be at IF)	8-bit signed	ADC clock f_{clk_adc}	512
2: Demodulated I-channel	8-bit signed	1 sample / I-symbol	512
3: FFT magnitude	8-bit unsigned	ADC clock f_{clk_adc}	512
4: Carrier tracking phase	8-bit signed	ADC clock f_{clk_adc}	512
Trace 2 signals	Format	Nominal sampling rate	Buffer length (samples)
1: I-channel spread input at near-zero center frequency	8-bit signed	ADC clock f_{clk_adc}	512
2: Code replica. Compare with spread input signals	8-bit signed	2 samples/chip	512
3: last demod AGC gain (I-channel)	8-bit unsigned	1 sample / symbol	512
4: Symbol tracking phase (accumulated)	8-bit signed	1 sample / symbol	512
Trace 3 signals	Format	Nominal sampling rate	Buffer length (samples)
1: I-channel after FFT frequency correction, resampling and channel LPF	8-bit signed	2 samples / chip	512
2: Demodulated Q-channel	8-bit signed	1 sample / Q-symbol	512
3: Code tracking phase correction (accumulated)	8-bit signed	2 samples / symbol	512

4: 2(S+N)/N after despreading. Valid only if code is locked. Linear (i.e. not in dBs)	8-bit unsigned	Symbol rate / 2.5	512
Trigger Signal	Format		
1: End of demodulated burst	Binary		
2: Missed burst detection (at end of expected burst)	Binary		
3. Demod sync word detection	Binary		


Signals sampling rates can be changed under software control by adjusting the decimation factor and/or selecting the f_{clk_adc} demod clock as real-time sampling clock.

In particular, selecting the f_{clk_adc} demod clock as real-time sampling clock allows one to have the same time-scale for all signals.

The ComScope user manual is available at www.comblock.com/download/comscope.pdf.

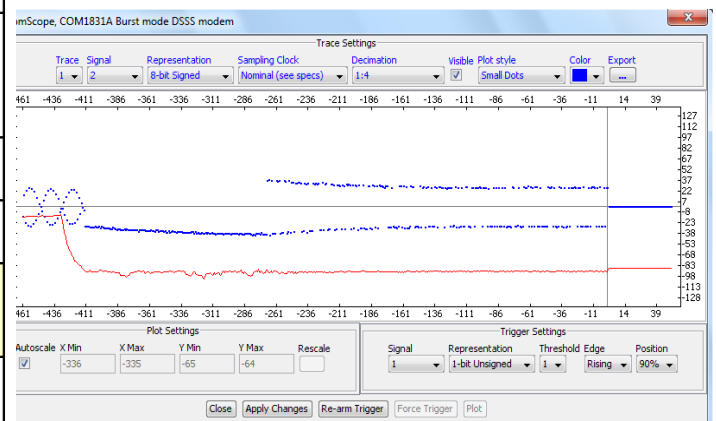

ComScope example, showing trace1 signal2 (in blue): demodulated I-bits during preamble (left) then data (right half). Trace2 signal 4 (in red) shows the I-symbol tracking phase.

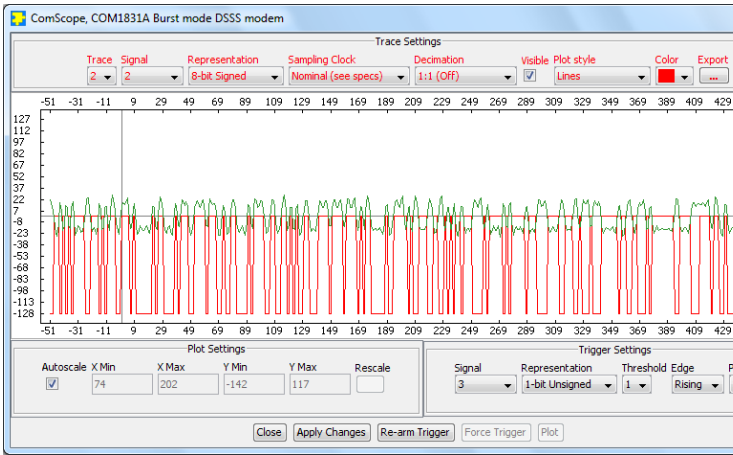

ComScope example, showing code lock with aligned: received spread signal after RRC filter (green) vs code replica (red)

LEDs

LED	Definition
Power	Green when power is applied
Alarm (red)	Red when one of these conditions occur: <ul style="list-style-type: none"> Tx RF frequency synthesizer is out of lock Rx RF frequency synthesizer is out of lock
Tx	Blink green when a frame from LAN/UDP is being transmitted
Rx	Blink green when a received frame is forwarded to the LAN/UDP
Sync	Yellow when BER tester synchronized (while in test mode. Transmitter must send PRBS11 test sequence)
Tx on	Yellow when BER tester byte error (valid only if BER tester is synchronized)

Digital Test Points

The test points are only accessible after opening the enclosure. They are intended to be used only for debugging purposes.

Test Point	Definition
TP1 PLL_LOCK	Tx RF frequency synthesizer lock status ('1' when locked)
TP2 DONE	FPGA configured ('1' when successfully configured)
TP3 PLL_LOCK	Rx RF frequency synthesizer lock status ('1' when locked)
TP4 RSSI	Received signal strength indicator. Practical range -70 to -5 dBm after LNA
J4.1	Transmit frame boundaries (0 = idle)
J4.2	Modulator saturation
J4.3	Demod code lock
J4.4	Demod signal presence detected at FFT
J4.5	Demodulator recovered carrier/center frequency (coarse)
J4.6	Demod data field(s) [demod state = 3]
J4.7	Demod sync word detection
J4.8	Missed burst detection
J4.9	FEC decoder input bit error
J4.10	BER tester synchronized
J4.11	BER tester matched filter output (detects start of PRBS11 sequence)
J4.12	Byte error detected by BER tester

Operation

Power supply

This unit is designed for a +28V DC (18 – 36V) power supply. Power consumption depends somewhat on the configuration. Maximum power consumption: 350mA under 28V. Power supply is through the front-panel connector.

A lower supply voltage, down to 5.6V, can be used when the LNB supply output is unused.


Frequency reference

Depending on the firmware version loaded, the frequency reference is an external 10 MHz signal supplied through the front panel (-B firmware option) or an internal 19.2 MHz VC-TCXO (-A firmware option).

Both -A and -B firmware options are pre-loaded and can be switched easily.

Warning: when selected as external frequency reference, the 10 MHz frequency reference must be present prior to powering on the modem.

Click on the button below to switch between installed firmware options:

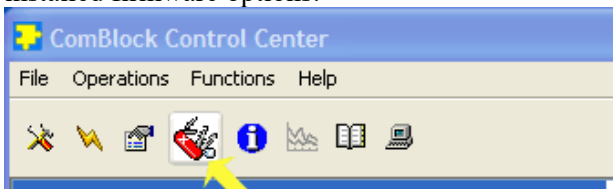

Output 10 MHz frequency reference


A 10 MHz frequency reference signal can be multiplexed with RF signals on the RF input (to an external LNB) and RF output (to an external BUC). The same 10 MHz is also available as an output on the front panel, labeled “10 MHz OUT”. Each one of these three clocks signals can be enabled or disabled by software command.

Spreading codes

Each burst undergoes spectrum spreading with user-selected pseudo-random codes. All fields (preambles, sync word, data) are spread.

Spreading codes are user-selected among a group of 2047-period Gold codes, irrespective of the symbol

rate. The codes are selected by their 11-bit A and C registers initialization.

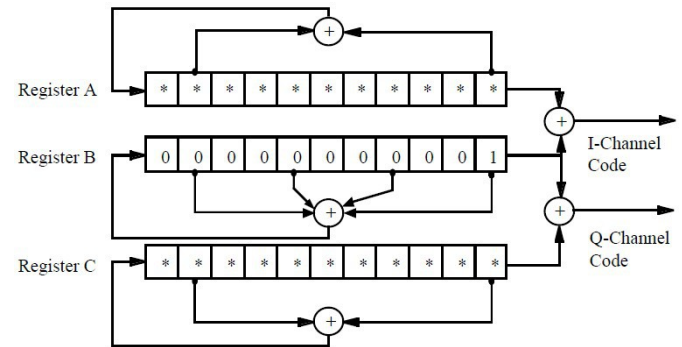

Note
Stage contents indicate initial conditions
* indicates user-unique initial conditions


Burst format

The modulator input consists of a 512-bit fixed-length payload data frame received over LAN/UDP.

The payload data frame is encoded with a convolutional code K=9, rate 1/2, resulting in an encoded frame of length 1040 bits (including the 16 tail bits).

When transmitting a single frame, the frame is encapsulated in a spread-spectrum burst comprising four distinct fields:

- no data preamble
- toggling bits preamble
- 32-bit synchronization field
- 1040-bit encoded payload field

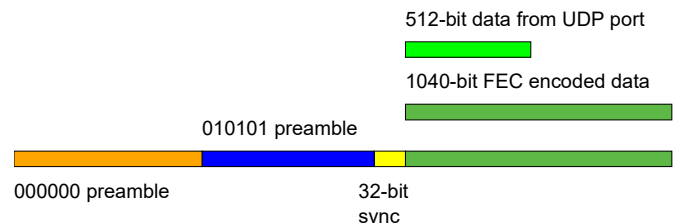

When transmitting multiple frames, follow-on frames are appended without preamble, separated only with a 32-bit sync word.

Transmission timing

A data frame received over UDP is transmitted without delay. The transmission time uncertainty is small (< TBD us). The user application is therefore fully in control of the burst scheduling, for example to prevent collisions in a multi-node network.

When the modulator is configured in PRBS11 test mode, the PRBS11 pseudo-random test sequence is generated internally, packetized in 512-bit frame and transmitted one frame every 100 ms. The UDP input is ignored while in this mode.

Input elastic buffer

When more than 512 bits of payload data is needed, multiple data frames can be queued for transmission in the elastic buffer. The modulator expects any follow-on frame to be entirely within the input elastic buffer before the previous frame transmission is complete (so as to avoid transmitting another long preamble). In this case, the modulator only inserts a 32-bit synchronization word between payload frames.

The input elastic buffer size is 8Kbit, large enough for 7 encoded frames.

Symbol rate

The symbol rate refers to the coded stream. The symbol rate can be set independently of the chip rate and code period. The demodulator includes an autonomous symbol tracking loop, separate from the code tracking loop.

Frequency acquisition & tracking

The frequency acquisition range depends on the chip rate and symbol rate, as defined by $\pm(\text{chip_rate} / 64)$ or $(1.8 * \text{symbol_rate})$, whichever is smaller, with no a priori knowledge.

Once locked, the carrier tracking loops tracks the carrier phase over a very wide frequency range.

Modulation


Baseline: BPSK spread with I-channel code.

Possible future extension: SQPN (I and Q channels spread with staggered I and Q code, Q-channel symbol rate = I-channel symbol rate / N, where N is an integer.

RSSI

The RSSI measurements (as reported in status registers SREG5/6) versus the receiver input level is plotted below for the two extreme operational

frequencies. The measurements are monotonous between -70 dBm and -5 dBm.

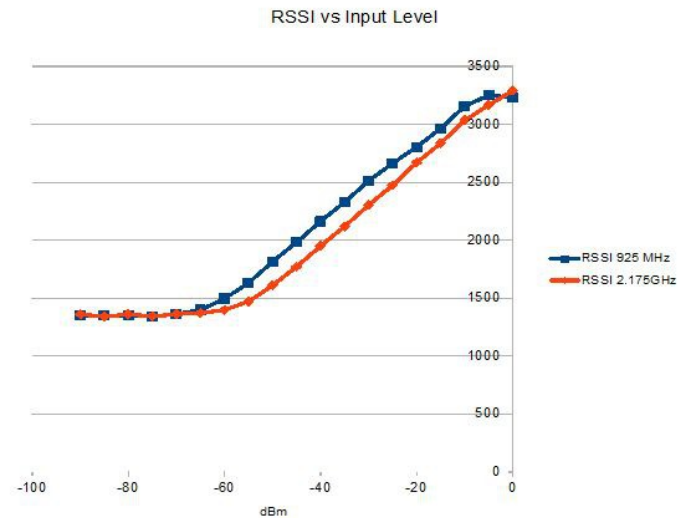

Note: RSSI measurement below -50 dBm is affected by the presence of 10 MHz frequency reference when supplied to an external LNB (see control register REG46(2)).

Customization

The transceiver design can be customized to meet alternate customer requirements. The customizable features are


- Custom radio-frequency bands within 400 MHz– 3GHz at no extra charge.
- Trade-off preamble length versus acquisition threshold E_b/N_0 . The baseline preamble is 1600 symbols for a threshold E_b/N_0 of 16 dB (PER > 99.9%). Lower threshold are achievable by increasing the integration time and thus the preamble length, down to E_b/N_0 of 5 dB for a preamble length of 32K symbols.

Customization has to be specified and quoted at the time of order.


Load Software Updates

From time to time, ComBlock software updates are released.


To manually update the software, highlight the ComBlock and click on the Swiss army knife button.

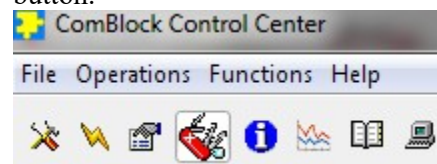

The receiver can store multiple personalities. The list of personalities stored within the ComBlock Flash memory will be shown upon clicking on the Swiss army knife button.

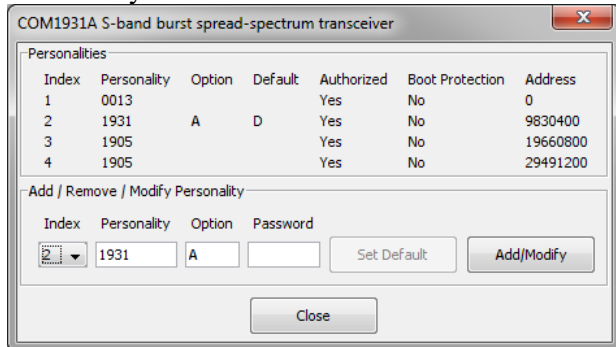

The default personality loaded at power up or after a reboot is identified by a 'D' in the Default column. Any unprotected personality can be updated while the Default personality is running. Select the personality index and click on the "Add/Modify" button.

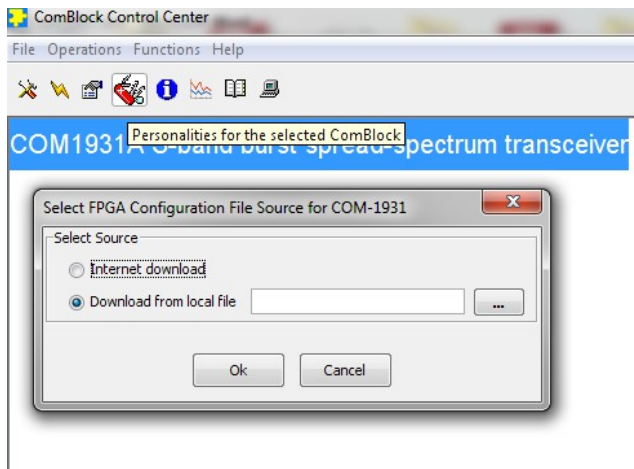

The software configuration files are named with the .bit extension. The bit file can be downloaded via the Internet, from the ComBlock CD or any other local file.

The option and revision for the software currently running within the FPGA are listed at the bottom of the advanced settings window.

Two firmware options are available for this receiver:

- A firmware uses an internal VCTCXO frequency reference.
- B firmware option requires an external 10 MHz frequency reference.

Recovery

The toggle button under the backpanel can be used to

- (a) prevent the FPGA configuration at power up. This can be useful if a bad FPGA configuration was loaded which resulted in loss of communication with the user.
- (b) reset the LAN1 IP address to 172.16.1.128.

To prevent the FPGA configuration at power up, turn off power. Toggle the button. Turn on power, wait 1 second, then toggle the button a second time.

To reset the LAN1 IP address to a factory default of 172.16.1.128: Turn on power. Toggle the button, wait at least 30 seconds, during which time the red led blinks, then toggle the button a second time. Wait another 10 seconds, then cycle power off/on.

Interfaces

10/100/1000 Ethernet LAN for data, monitoring and control	RJ45 Supports auto MDIX to alleviate the need for crossover cable.
10 MHz frequency reference input	10 MHz frequency reference input for frequency synthesis. Sinewave, clipped sinewave or squarewave. SMA female connector Input is AC coupled. Minimum level 0.6Vpp. Maximum level: 3.3Vpp.
10 MHz frequency reference output	10 MHz frequency reference output generated either from the 10 MHz frequency reference input (-B firmware option) or from the internal TCXO (-A firmware option)
RF Rx	Receiver input. 50 Ohm, SMA female connector. Operating range: -60 to -10 dBm Maximum no damage input level: + 20 dBm Two other signals can be multiplexed onto the same coaxial connection between the COM-1931 transceiver and an external LNB: <ul style="list-style-type: none"> • 10 MHz frequency reference (software enabled) Level: -2 dBm typ. • 13/18V supply (software enabled)
RF Tx	Transmitter output. 50 Ohm, SMA female connector. Transmit level: -30 to 0 dBm, user selectable. One other signal can be multiplexed onto the same coaxial connection between the COM-1931 transceiver and an external BUC: <ul style="list-style-type: none"> • 10 MHz frequency reference (software enabled) Level: 0 dBm typ.

Operating input voltage range

Supply voltage	+18V min, +36V max 400mA typ. under +28VDC
Supply voltage (when no LNB 13/18V supply needed)	+5.6V min, +36V max

The positive voltage is on the center pin, the ground on the outer barrel.

Absolute maximum ratings

Supply voltage	+45 V max
RF input	+20dBm max

Mechanical Interface

Aluminum enclosure with rubberized end caps.
L x W x H: 168.5mm x 138.96 mm x 40.98 mm.
Includes two optional 40mm mounting flanges for mounting to a flat support plate.

Schematics

The board schematics are available on-line at http://comblock.com/download/com_1900schematics.pdf

Configuration Management

This specification is to be used in conjunction with VHDL software revision 1 and ComBlock control center revision 3.11g and above.

ARM processor firmware version:
CB1900_1_6.hex 5/4/16

FPGA/VHDL version:
COM-1931_000 8/25/15

It is possible to read back the option and version of the FPGA configuration currently active. Using the ComBlock Control Center, highlight the COM-1931 module, then go to the advanced settings. The option and version are listed at the bottom of the configuration panel.

Troubleshooting Checklist

Excessive power consumption:

- The receiver input is capable of supplying 13/18V DC to an external LNB. When using RF attenuators at the input in a RF loopback

test, please make sure to use a DC block between the RFin and the attenuator.


See www.comblock.com/download/com1831soft.pdf

Demodulator can't achieve lock even at high signal-to-noise ratios:

- Make sure the modulator baseband I/Q signals do not saturate, as such saturation would strongly distort the modulation phase information. (this is a phase demodulator!)

VHDL code / IP core

The FPGA code is written in VHDL. It does not use any third-party software. It occupies the following FPGA resources:

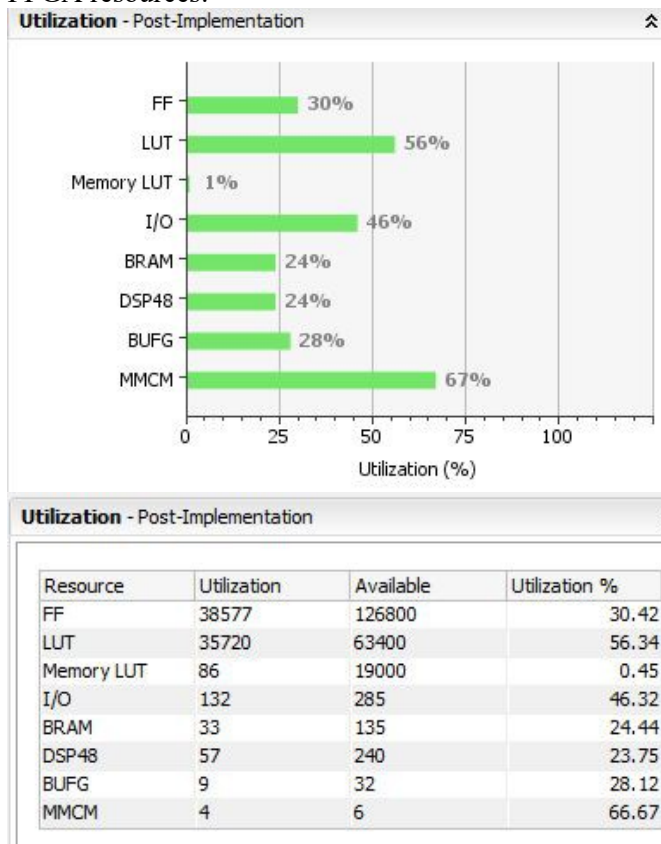

The maximum chip rate is limited by

- the FPGA technology. For example nearly 80 Mchips/s for Xilinx Artix 7 –1 speed (XC7A100T-1)
- the receiver IF band-pass filter (40 MHz bandwidth)

The IP core, which includes all VHDL source code, can be purchased separately. It is not needed to operate the ready-to-use COM-1931 transceiver.

ComBlock Ordering Information

COM-1931 L/S-band burst spread-spectrum
transceiver

ECCN: 5A001.b.3

MSS • 845 Quince Orchard Boulevard Ste N•
Gaithersburg, Maryland 20878-1676 • U.S.A.
Telephone: (240) 631-1111
Facsimile: (240) 631-1676
E-mail: sales@comblock.com